






GRU A MONTAGGIO RAPIDO
 GRUE A MONTAGE RAPIDE
 GRUA DE RAPIDO MONTAJE
 GRUA DE MONTAGEM RAPIDA
 QUICK SELFERECTING CRANE
 HYDRAULISCHER SCHNELLMONTAGEKRAN











EN 14439-C25
 FEM 1.001 - A3


Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas

	3	20	35	m
	1000	1000	1000	kg


	12	14	15,5	16	18	18,1	20	20,9	22	24	26	28	30	32	34	36	m
4t 	4000	3300	2790	2410	2120	2000	1880	1690	1520	1390	1270	1170	1080	1000			kg
2t 							2000	1880	1690	1520	1390	1270	1170	1080	1000		kg
2.5t 						2500	2215		1980	1780	1620	1490	1370	1270	1180	1100	kg
3t 			3000	2890	2510	2215		1980	1780	1620	1490	1370	1270	1180	1100		kg

	12,9	14	16	16,8	18	19,6	20	22	22,7	24	26	28	30	32	m
4t 	4000	3630	3080	2660	2340	2080	2000	1860	1690	1540	1410	1300			kg
2t 							2000	1860	1690	1540	1410	1300			kg
2.5t 						2500	2430	2170		1960	1790	1640	1510	1400	kg
3t 			3000	2760	2430	2170		1960	1790	1640	1510	1400			kg

	12,3	14	15,9	16	18	18,5	20	21,5	22	24	26	27	m
4t 	4000	3400	2880	2490	2180	2000	1940	1740	1570	1500			kg
2t 							2000	1940	1740	1570	1500		kg
2.5t 						2500	2280		2040	1840	1670	1600	kg
3t 			3000	2970	2850	2280		2040	1840	1670	1600		kg

	3	14	m
	4000	4000	kg

Reazioni – Reactions – Réactions – Eckdrücke – Reacciones – Reacções




R1 ● 27,5 t ■ 18,5 t

▲ 16.5 t ◆ 25,6 t

{ N°2 A=3500Kg (1750Kgx2)
 N°2 B=2100Kg (1050Kgx2)
 N°16 C=20000Kg (1250Kgx16)


- | | | |
|-------------------------------|---------------------------------------|--------------------------------------|
| ● Reazioni in servizio | ● Reactions in service | ● Réactions en service |
| ■ Reazioni fuori servizio | ■ Reactions out of service | ■ Réactions hors service |
| ▲ Peso della gru senza assali | ▲ Dead weight without transport axles | ▲ Poids de construction sans essieux |
| ◆ Peso zavorra rotante | ◆ Ballast weight | ◆ Poids du lest |
-
- | | | |
|--|--|---|
| ● Reaktionskräfte in betrieb | ● Reacciones en servicio | ● Em serviço |
| ■ Reaktionskräfte außer betrieb | ■ Reacciones fuera de servicio | ■ Fora de serviço |
| ▲ Konstruktionsgewicht ohne transportachse | ▲ Peso de la grua sin tren de transporte | ▲ Peso de la grua sem carro de transporte |
| ◆ Ballastgewicht | ◆ Peso de lastre | ◆ Peso de lastre rotativo |

Montaggio — Montage — Erection — Montage — Montaje — Montagem

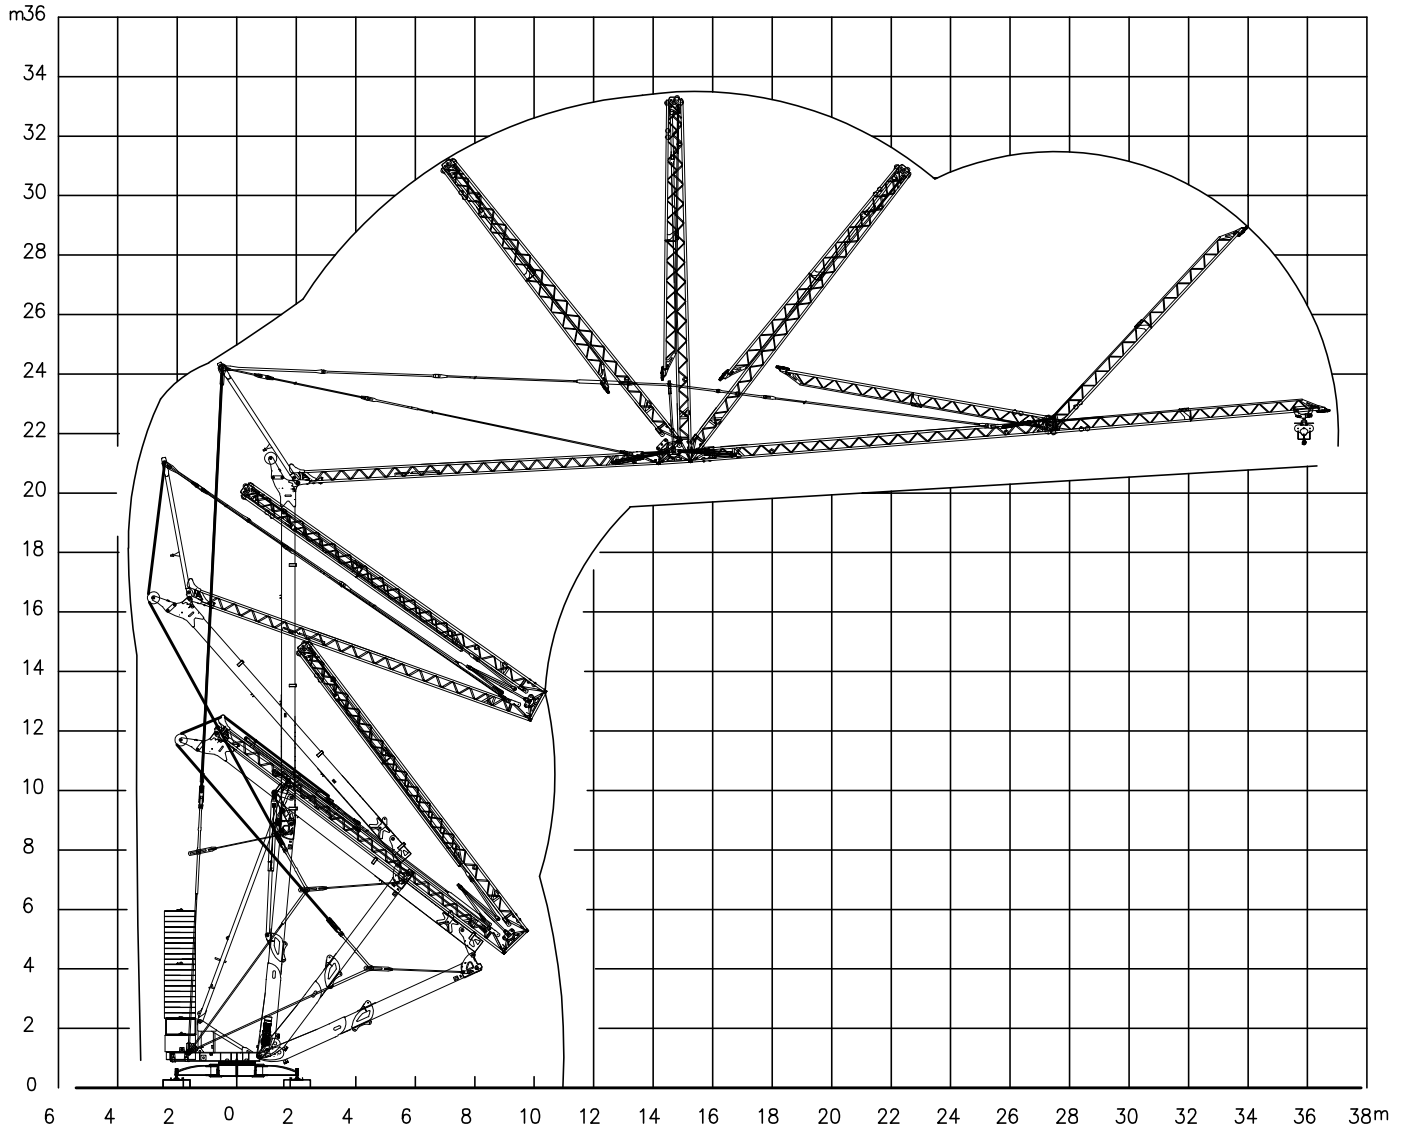

Trasporto – Transport – Transport – Transport – Transporte – Transporte


Trasporto

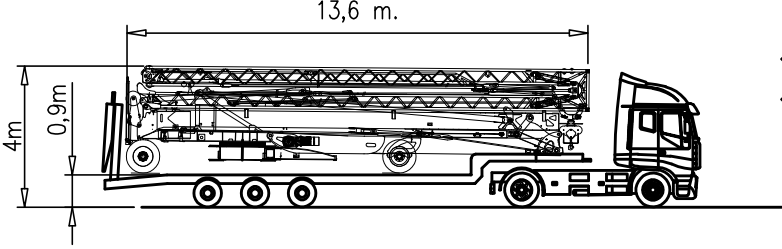

- ◆ Blocchi A 2x1800=3600 Kg
- ◆ Blocchi B 2x1000=2000 Kg

Peso di Trasporto (Blocchi A+B)	Kg	23400
---------------------------------	----	-------


Traino 5Km/h

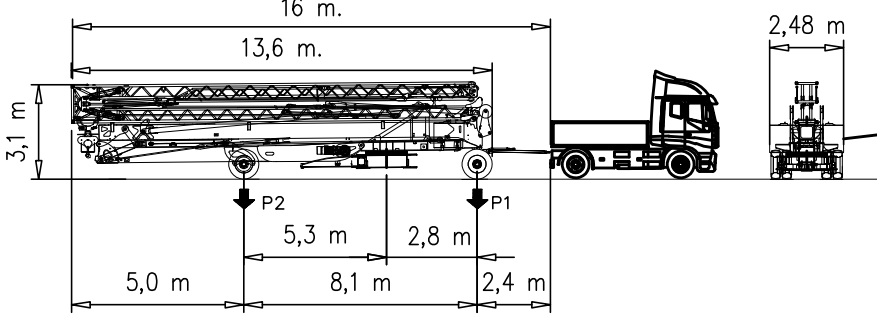

- ◆ Blocchi A 2x1800=3600 Kg

P1	Kg	8180
P2	Kg	13220
Ptot	Kg	21400


Traino 25Km/h

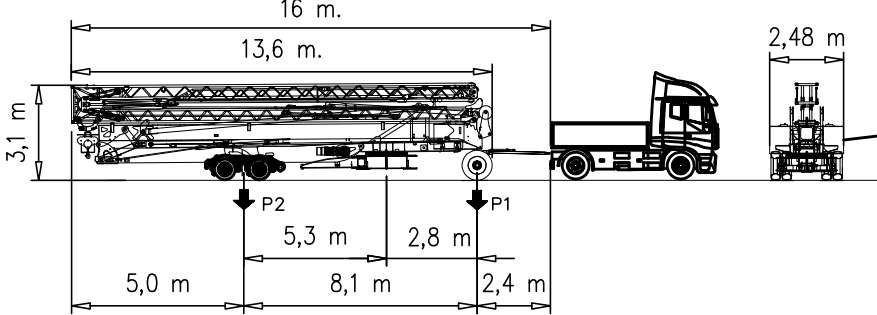

- ◆ Blocchi A 2x1800=3600 Kg

P1	Kg	8610
P2	Kg	14140
Ptot	Kg	22750


Traino 80Km/h

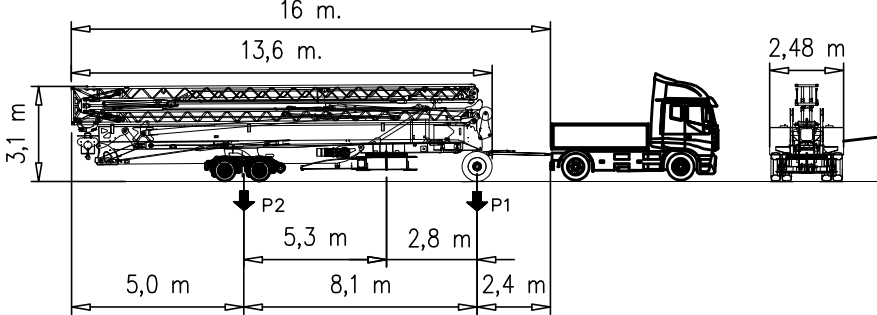

- ◆ Blocchi A 2x1800=3600 Kg

P1	Kg	9110
P2	Kg	14740
Ptot	Kg	23850


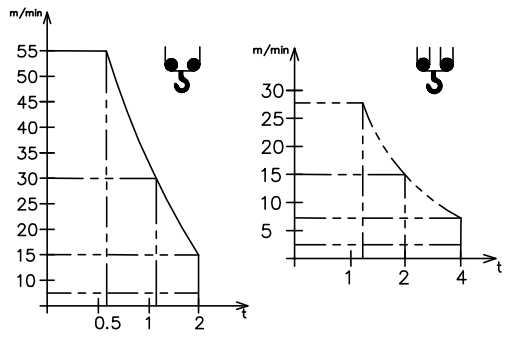





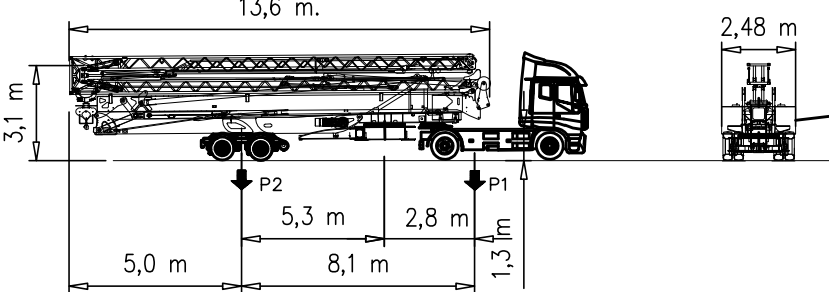

Traino 80Km/h











- ◆ Blocchi A 2x1800=3600 Kg

P1	Kg	9110
P2	Kg	14740
Ptot	Kg	23850

Meccanismi – Mechanisms – Mécanismes – Antriebe – Mecanismos

V15.45 Sollevamento Hoisting Levage Heben Elevaciòn Elevaçao	m/min							V15.45 11 kW (15 Hp) 20 kVA 
		t	4	15	30			
	m/min							
		t	2	7.5	15			
V15.35 Sollevamento Hoisting Levage Heben Elevaciòn Elevaçao	m/min						V15.35 11 kW (15 Hp) 20 kVA 	
		t	6	17	25			35
	m/min							
		t	3.0	3.0	2.0			0.7

Carrello Trolleying Distribution Katzfahren Distribuciòn Distribuïçao			1a	0 → 33	m/min	3 kW
			2a			
			3a			
Rotazione Slewing Orientation Schwenken Orientaciòn Rotaçao		 12°	1a	0 → 22	m/min	3 kW
			2a			
			3a			
Rotazione Slewing Orientation Schwenken Orientaciòn Rotaçao		 20°	1a	0 → 22	m/min	3 kW
			2a			
			3a			
Rotazione Slewing Orientation Schwenken Orientaciòn Rotaçao			1a	0 → 0.95	giri/min tr/min rp/min	2.2 kW
			2a			
			3a			

	400V – 50 Hz
Potenza elettrica necessaria – Puissance électrique nécessaire Necessary electric power – Anschlusswert – Potencia electrica necesaria	V12.40 18 kVA V15.45 20 kVA
Conforme alla direttiva 2000/14/CE sul livello acustico Conforme à la directive 2000/14/CE sur le niveau acoustique In compliance with the 2000/14/CE instruction on noise level Gemäss EWG-Richtlinie 2000/14/CE über Schall-Leistungspegel Conforme con la directiva 2000/14/CE sobre el nivel acustico	FEM 1.001–A3


 FMgru s.r.l.
 via Emilia 11–29010 Pontenure PC ITALY
 tel. 0523/510446 ric.aut. fax 0523/510365
 www.fmgru.it e-mail: info@fmgru.com



Documento commerciale non contrattuale
 Per tutte le informazioni tecniche riferirsi
 alle corrispondenti istruzioni

Unverbindliches Vertriebsdokument.
 Für technische Informationen, siehe die
 entsprechenden Anweisungen.

This commercial document is not legally
 binding. For any technical information, please
 refer to the corresponding instructions.

Documento comercial no contractual
 Para cualquier información técnica,
 ver la noticia correspondiente.

Code: 15ICA37B65A0			
Ed.	Data	Rev	Data
1	09.12.13	3	22.03.19