



1030 RBI-V1



EN 14439-C25
2000/14/CE



Simple setup



FM-Link



Power Control



ASsys




ACsys

1030 RBI-V1

Funzionamento

Operation - Betrieb - Exploitation - Accionamiento

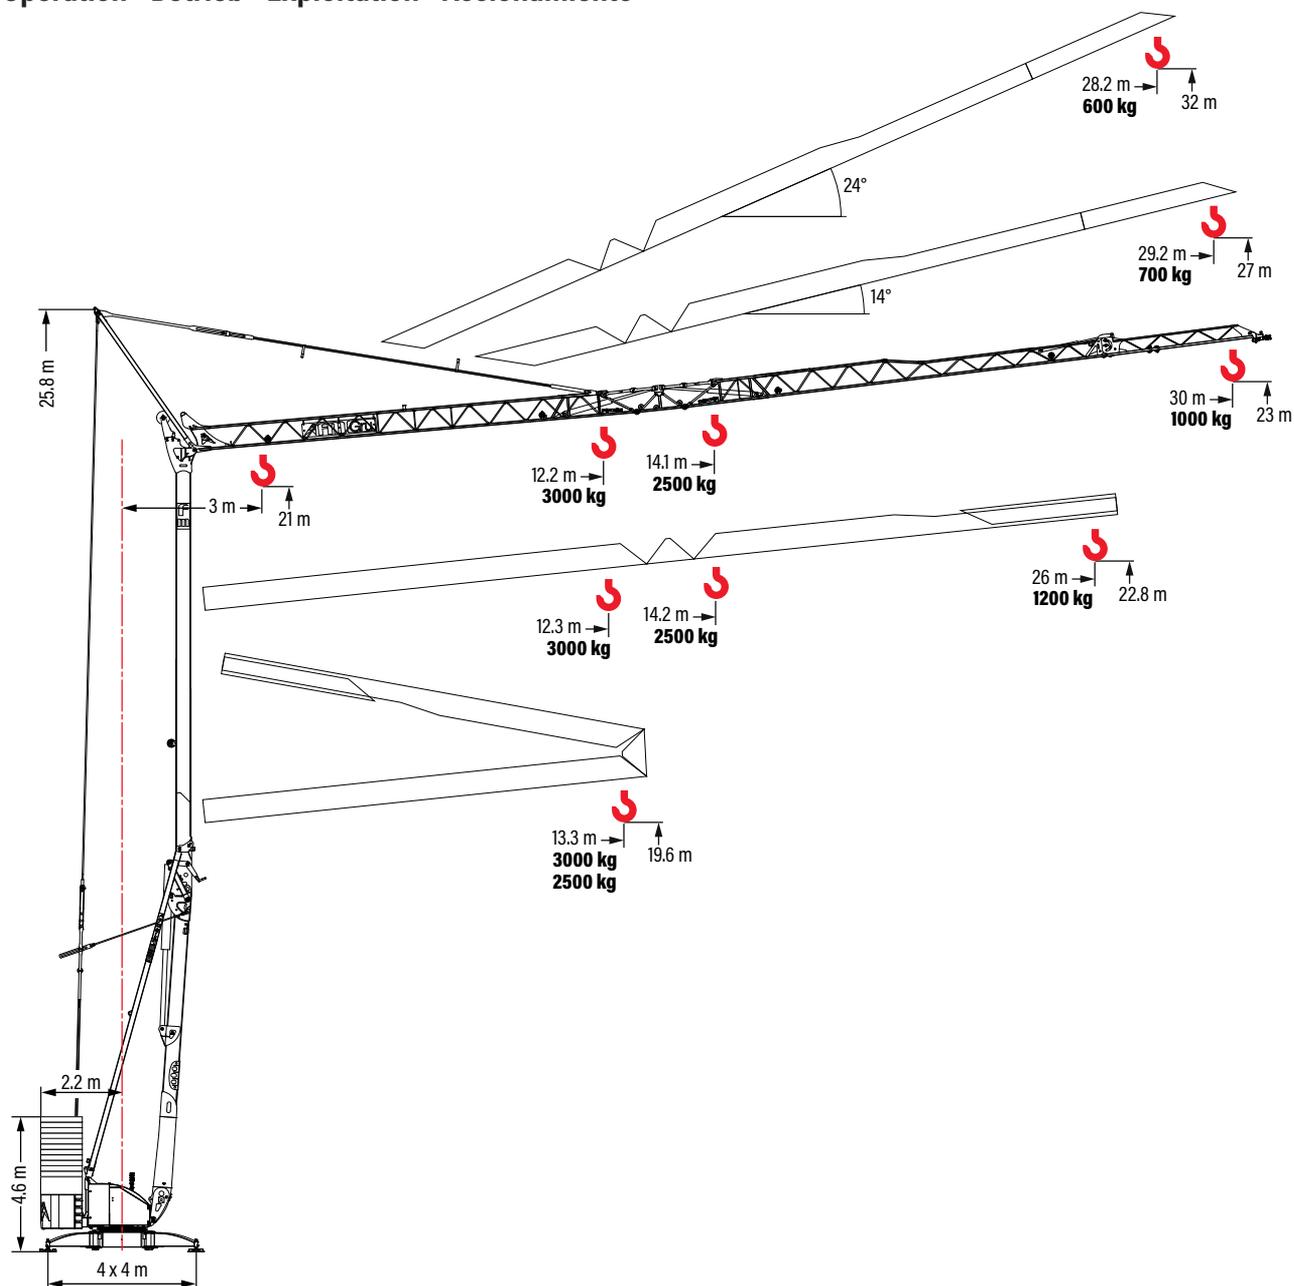

Pesi e reazioni

Weights and reactions - Gewichte und Reaktionen - Poids et réactions - Pesos y reacciones

- Reazioni in servizio
Reactions in service
Reaktionskräfte in Betrieb
Réactions en service
Reacciones en servicio
- Reazioni fuori servizio
Reactions out of service
Reaktionskräfte außer Betrieb
Réactions hors service
Reacciones fuera de servicio

6 x 2400 kg	11 x 1250 kg
2 x 1300 kg	2 x 1300 kg
2 x 2200 kg	2 x 2200 kg
Tot = 21400 kg	Tot = 20750 kg

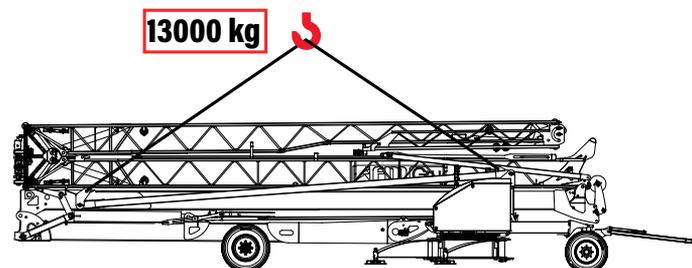



Diagramma di portate

Load diagram - Lastkurven - Courbes de charges - Curvas de cargas

5°

230-400 V		m	3	10	12	13.3	14	16	18	20	22	24	26	28	30
30.0 m	3000 kg - 12.2 m	kg	3000				2530	2150	1860	1640	1460	1320	1190	1080	1000
26.0 m	3000 kg - 12.3 m	kg	3000				2540	2160	1870	1650	1470	1320	1200		
13.3 m	3000 kg - 13.3 m	kg	3000												

230-400 V		m	3	10	12	13.3	14	16	18	20	22	24	26	28	30
30.0 m	2500 kg - 14.1 m	kg	2500					2150	1860	1640	1460	1320	1190	1080	1000
26.0 m	2500 kg - 14.2 m	kg	2500					2160	1870	1650	1470	1320	1200		
13.3 m	2500 kg - 13.3 m	kg	2500												

14°


230-400 V		m	3	29.2
29.2 m	700 kg - 29.2 m	kg	700	

24°

230-400 V		m	3	28.2
28.2 m	600 kg - 28.2 m	kg	600	

Trasporto



Transport - Transport - Transport - Transporte

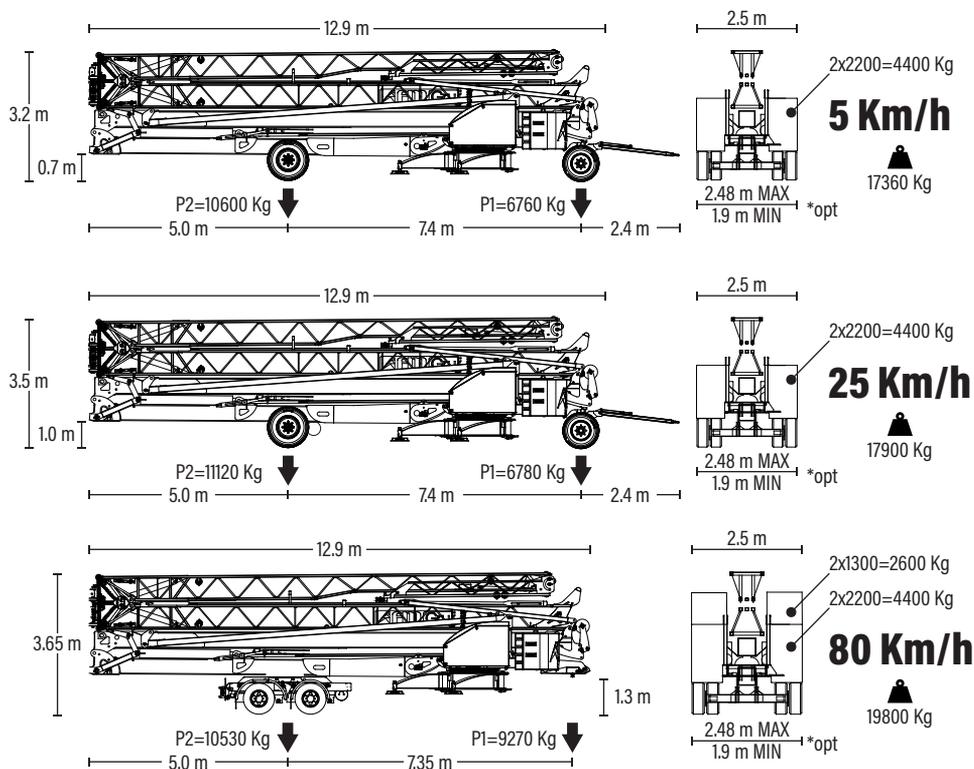



1030 RBI-V1

Meccanismi

Mechanisms - Antriebe - mécanismes - Mecanismos

	V15.35 11 kW		m/min	6	17	25	35		
			t	3.0	3.0	2.0	0.7		
	V15.45 11 kW		m/min	4	21	42	46	52	
			t	2.5	2.5	1.25	1.1	0.9	


	0 <-> 45 m/min 3 kW
--	------------------------

	0 <-> 0.8 rpm 2.2 kW
--	-------------------------

	230 V - 50 Hz: 2 kVA 
	400 V - 50 Hz: 20 kVA 

Montaggio

Erection- Montage - Montage - Montaje

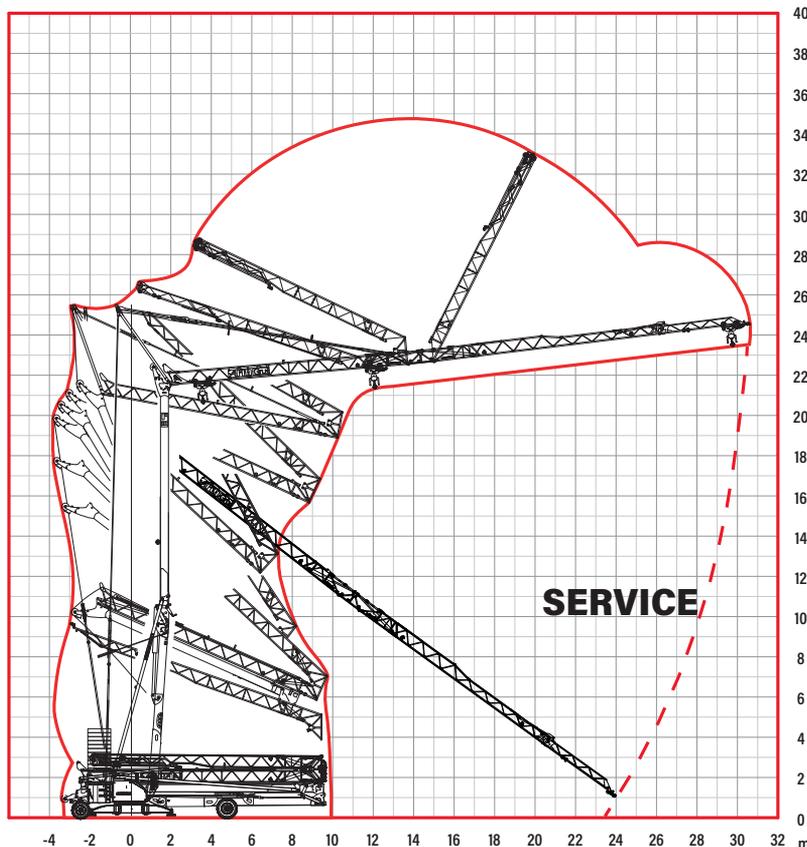

Documento commerciale non contrattuale.
Per tutte le informazioni tecniche riferirsi
alle corrispondenti istruzioni.

This commercial document is not legally
binding. For any technical information,
please refer to the corresponding
instructions.

Unverbindliches Vertriebsdokument.
Für technische Informationen, siehe die
entsprechenden Anweisungen.

Ce document commercial n'est pas
juridiquement contraignant. Pour toute
information technique, veuillez vous référer
aux instructions correspondantes.

Documento comercial no contractual.
Para cualquier información técnica, ver la
noticia correspondiente.



 Eco power: tecnologia risparmio consumi